



IGLO EDGE

7-chamber frame and sash profiles, with an installation depth of 82 mm. The system is equipped with a specially designed triple seal: external, internal and central made of EPDM and gaskets under the glazing unit.

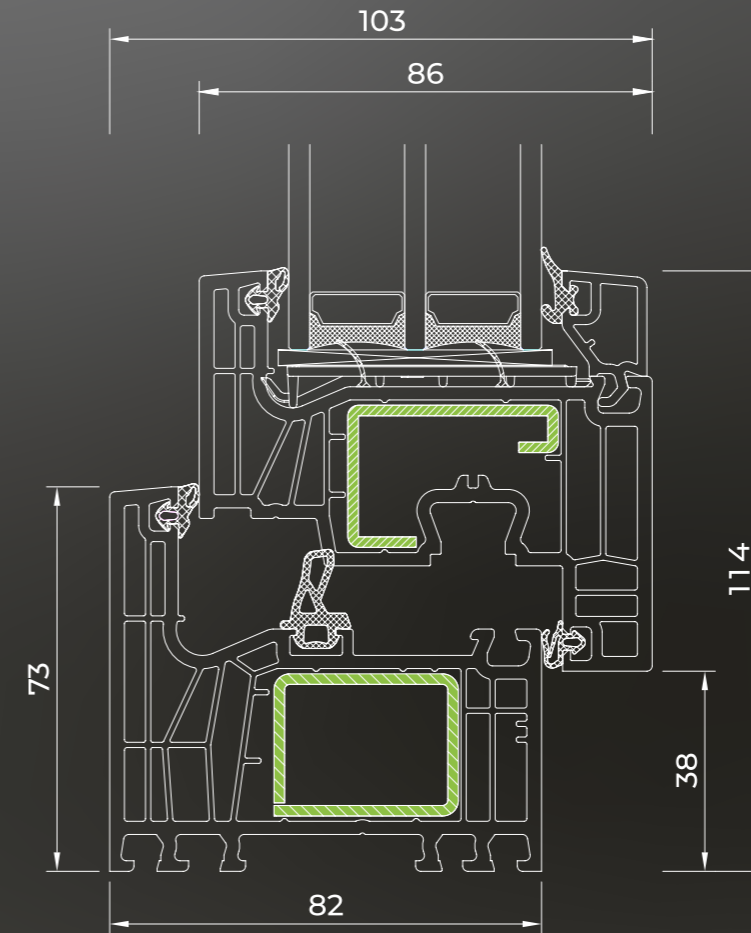

- MACO fittings with 4 anti-burglary catches
- 2-chamber glazing unit filled with argon with $U_g=0,5 \text{ W/(m}^2\text{K)}$, optionally 3-chamber package with $U_g=0,4 \text{ W/(m}^2\text{K)}$
- glazing with packages in the range of (by default in a 2-chamber package 48 mm - 4/18/4/18/4)
- Swisspacer Ultimate warm plastic edge (optional galvanized steel spacer)
- microventilation
- aluminum handle DUBLIN
- black or grey EPDM perimeter, glazing and central seals
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 2 mm full (closed) steel frame reinforcement, L-shaped steel door sash reinforcement
- 5-chamber PVC under-sill strip with a standard seal
- V-Perfect weld as standard

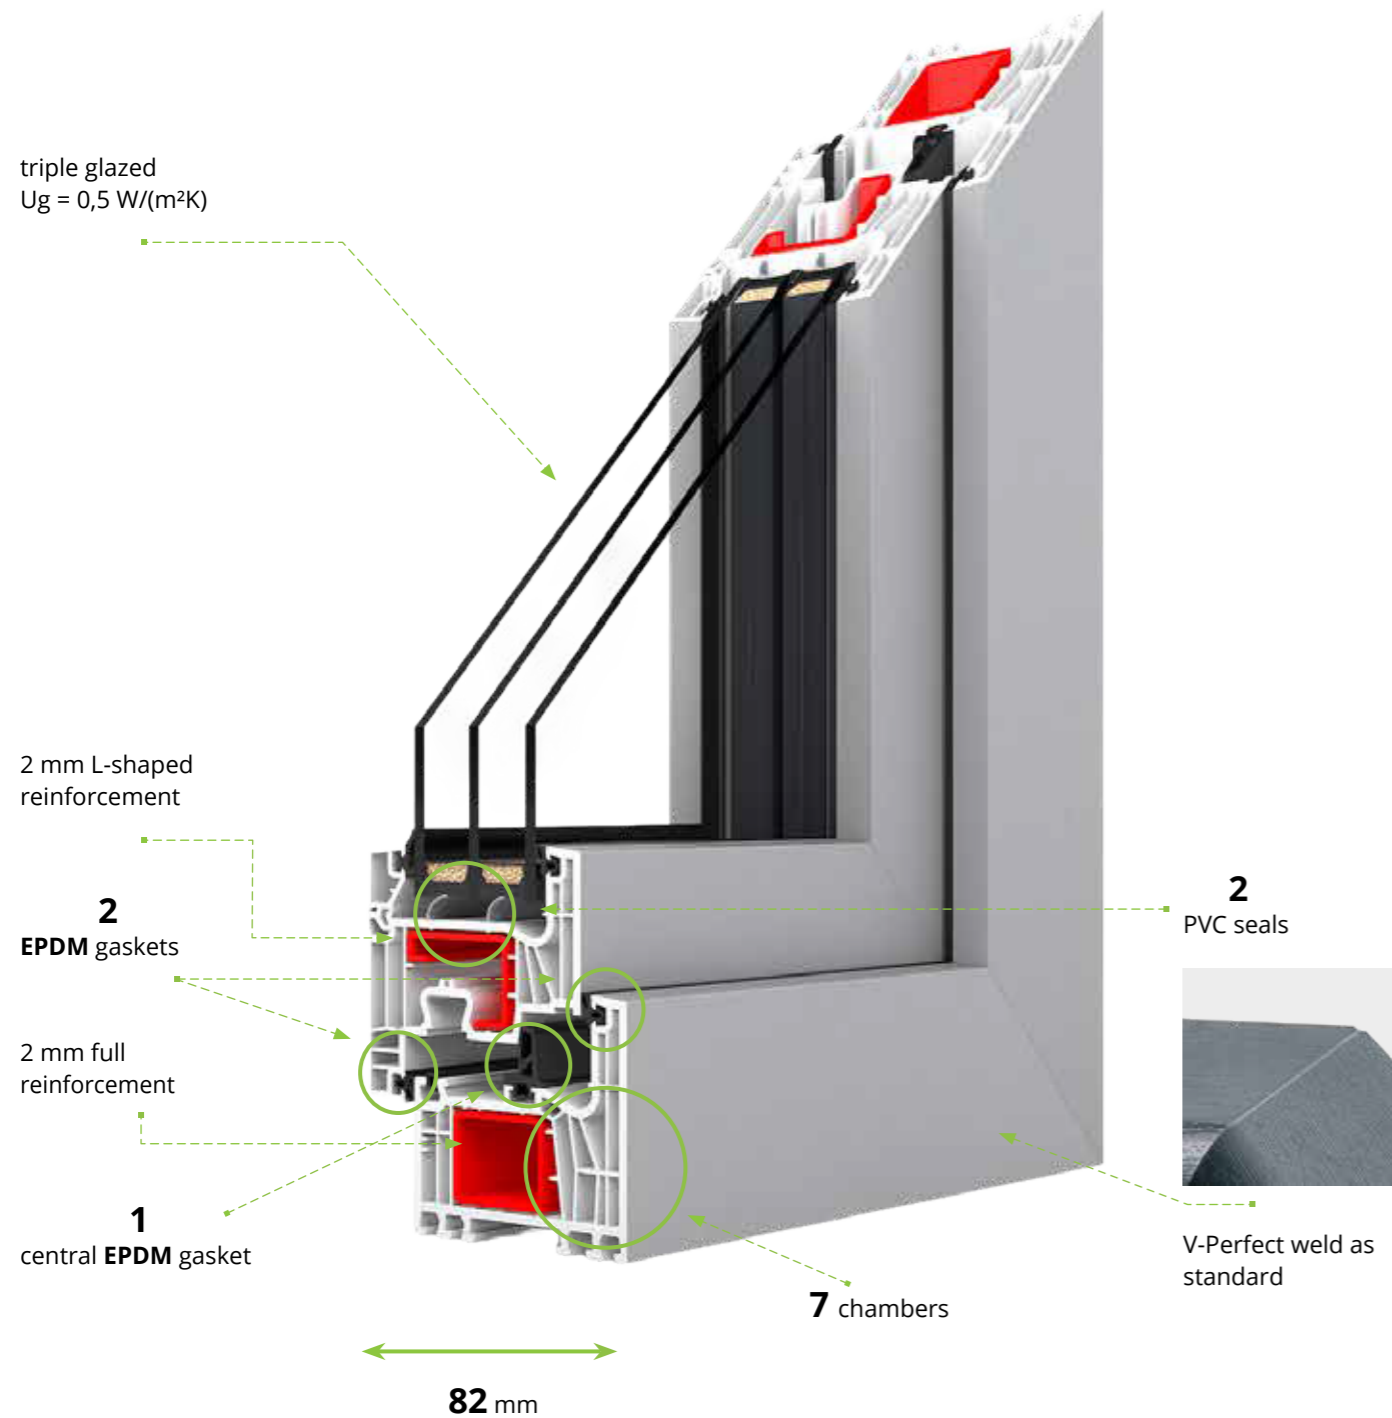

7
chambers

3
EPDM gaskets

82
installation depth
/ mm /

40+
colors

Contact us:

Via Phone: +1 775-636-8138

Via email: info@ecowds.com